


## Midpoint-A6

Surface mounted spotlight - Direct light distribution

Article code: PA6AWE-930FM-BK



Illustrations may only be similar and serve as an orientation.

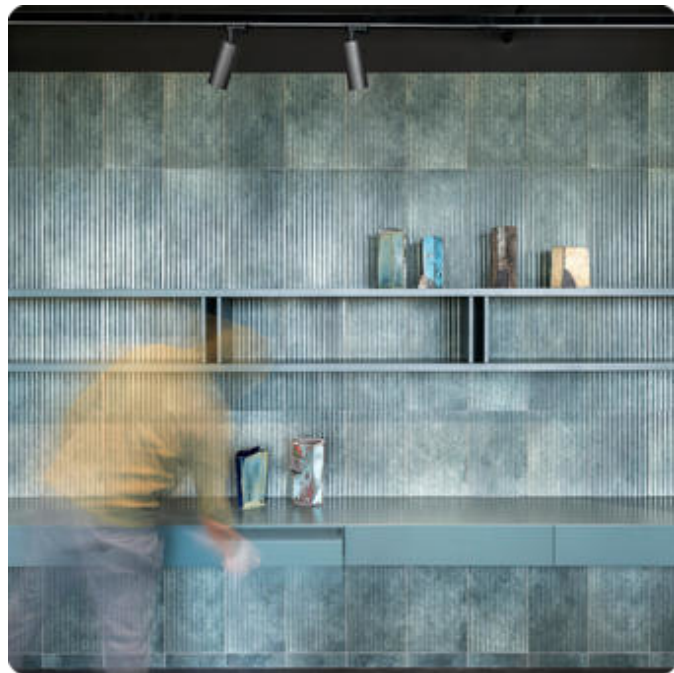

Midpoint-A6. LED. Surface mounted spotlight, 350° rotatable and 90° swivelable. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >90. Reflector with beam angle SPOT 10°. Reflector: Jet Black. Economic-LED: Highest efficiency, CRI>90. Clear Cover. Switchable. DxH (spots). D=

90mm. H=155mm. Medium-power current. 1860lm. 31W. 1,3kg. Binning initial ≤ MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG1 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Midpoint-A6

Surface mounted spotlight - Direct light distribution



Article code: PA6AWE-930FM-BK

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Midpoint-A6
Lamp	LED
Installation Type	Surface mounted spotlight
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>90
Reflector Beam Angle	Reflector: SPOT 10°
Reflector Colour Inside	Reflector: Jet Black
LED-Module Type	Eco-LED (CRI>90)
Cover	Clear Cover
Control	Switchable
Length L/Diameter D (mm)	D=90mm
Height H (mm)	H=155mm
Current/Power	Medium-Power
Luminous Flux	1860lm
Power consumption	31W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	9 30 / 3 3 9
Photobiological class	RG1 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	1,3kg

