

## Cubic-U4

Pendant luminaire - Indirect light distribution

Article code: CU4UEE-830H-L900-K



Illustrations may only be similar and serve as an orientation.



Cubic-U4. LED. Pendant luminaire. Luminaire body with 25mm visible overall height. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Indirect only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Indirect reflector. Switchable. LxWxH (rectangular). L=900mm. W=200mm. H=25mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set). Pendant length max 1500mm. Power supply: transparent. Ceiling

rose: Matching luminaire`s surface colour. High-power current. 4825lm. 39W. 3kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25° C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Cubic-U4

Pendant luminaire - Indirect light distribution

Article code: CU4UEE-830H-L900-K

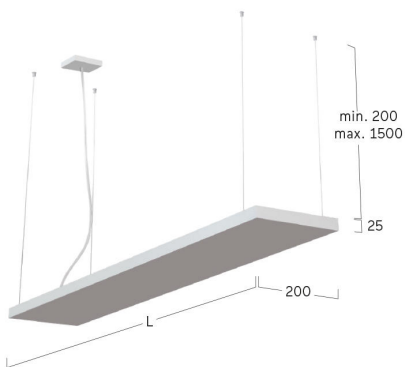

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Cubic-U4
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Silver Anodised
Light characteristics	Indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Indirect reflector
Control	Switchable
Length L/Diameter D (mm)	L=900mm
Width W (mm)	W=200mm
Height H (mm)	H=25mm
Current/Power	High-Power
Luminous Flux	4825lm
Power consumption	39W
Suspension	Parallel susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 1500mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	3kg

