

Cubic-T2

Table light - Direct/indirect light distribution

Article code: CT2AEX-830M-L600-T-A



Illustrations may only be similar and serve as an orientation.

Cubic-T2. LED. Table light. Luminaire head with 25mm minimalist overall height. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. $UGR \leq 19$. Dimmable. LxWxH (luminaire head, rectangular). L=600mm. W=300mm. H=25mm. Medium-power current. 10379lm. 68W.



8,1kg. Binning initial \leq MacAdam 3. Table clamp matching luminaire's outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

lightnet

Cubic-T2

Table light - Direct/indirect light distribution

Article code: CT2AEX-830M-L600-T-A

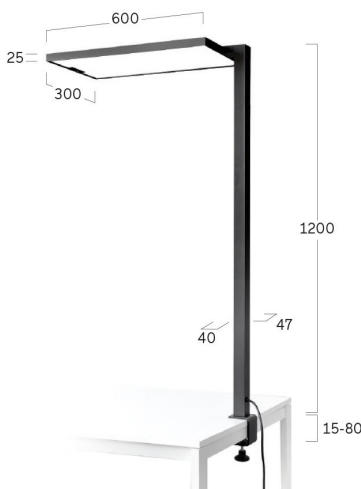

Customer / Project: _____

Note: _____

Productname	Cubic-T2
Lamp	LED
Installation Type	Table light
Surface finish	Silver Anodised
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Separately dimmable
Length L/Diameter D (mm)	L=600mm
Width W (mm)	W=300mm
Height H (mm)	H=25mm
Current/Power	Medium-Power
Luminous Flux	10379lm
Power consumption	68W
Base-Type	Table clamp
Plug	Schuko CEE 7/7 (E+F)
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 30 / 3 3 9
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	8,1kg

