

Beam Me Up-T1

Table light - Direct/indirect light distribution

Article code: MT1AWX-830M-D450-TG-A



Illustrations may only be similar and serve as an orientation.



Beam Me Up-T1. LED. Design table lamp, with a setback lens optic in a decorative ring. Luminaire head made of high-quality processed fiberglass. Surface finish Snow White. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR≤19. Reflector: Satin Gold. Dimmable. DxH (luminaire head, round/Stand). D=450mm. H=90/1200mm.

Medium-power current. 8462lm. 74W. 7,4kg. Binning initial ≤ MacAdam 3. Table clamp matching luminaire's outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Beam Me Up-T1

Table light - Direct/indirect light distribution

Article code: MT1AWX-830M-D450-TG-A

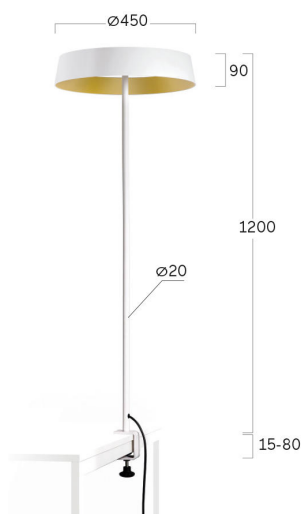

Customer / Project: _____

Note: _____

Productname	Beam Me Up-T1
Lamp	LED
Installation Type	Table light
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Reflector Colour Inside	Reflector: Satin Gold
Control	Separately dimmable
Length L/Diameter D (mm)	D=450mm
Height H (mm)	H=90/1200mm
Current/Power	Medium-Power
Luminous Flux	8462lm
Power consumption	74W
Base-Type	Table clamp
Plug	Schuko CEE 7/7 (E+F)
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 30 / 3 3 9
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	7,4kg

