


Ringo Star-G3 Acoustic

Acoustic pendant luminaire - Direct light distribution

Article code: RG3ASL-840H-D1500-U-AW



Illustrations may only be similar and serve as an orientation.

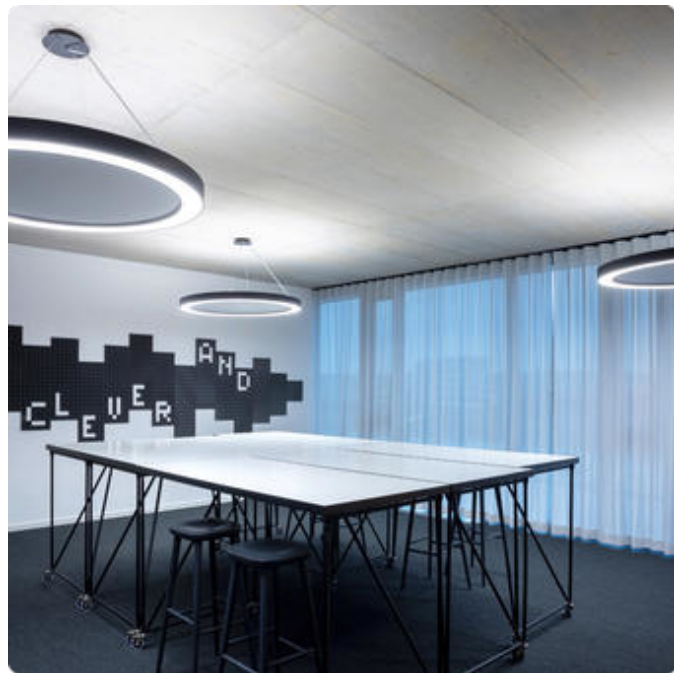


Ringo Star-G3 Acoustic. LED. Acoustic pendant luminaire with internal, acoustically highly effective broadband absorber. Luminaire body made of aluminium profile with 60mm track width. Surface finish Radiant Silver. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. Dimmable DALI. DxHxW (round). D=1500mm. W=60mm. H=85mm. Central cord suspension with ceiling rose and power supply cable (Set). Pendant length max 4000mm. Power

supply: transparent. Ceiling rose: Matching luminaire's surface colour. High-power current. 10700lm. 143W. 29kg. Binning initial <= MacAdam 3. Acoustic element: White Perforated. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Ringo Star-G3 Acoustic

Acoustic pendant luminaire - Direct light distribution

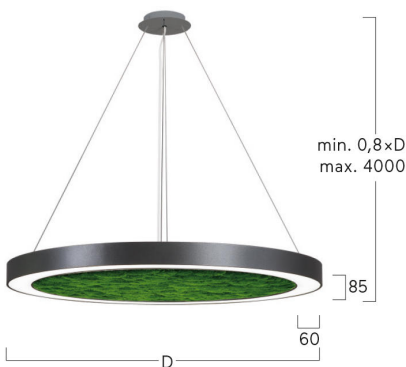

Article code: RG3ASL-840H-D1500-U-AW

Customer / Project: _____

Note: _____

Productname	Ringo Star-G3 Acoustic
Lamp	LED
Installation Type	Acoustic pendant luminaire
Surface finish	Radiant Silver
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=1500mm
Width W (mm)	W=60mm
Height H (mm)	H=85mm
Current/Power	High-Power
Luminous Flux	10700lm
Power consumption	143W
Suspension	Central susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 4000mm
Acoustic absorber	Absorber (White Perforated)
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	29kg

