



Ringo Star Chain-G3

Pendant luminaire - Direct light distribution

Article code: RG3OWE-827M-5R-K

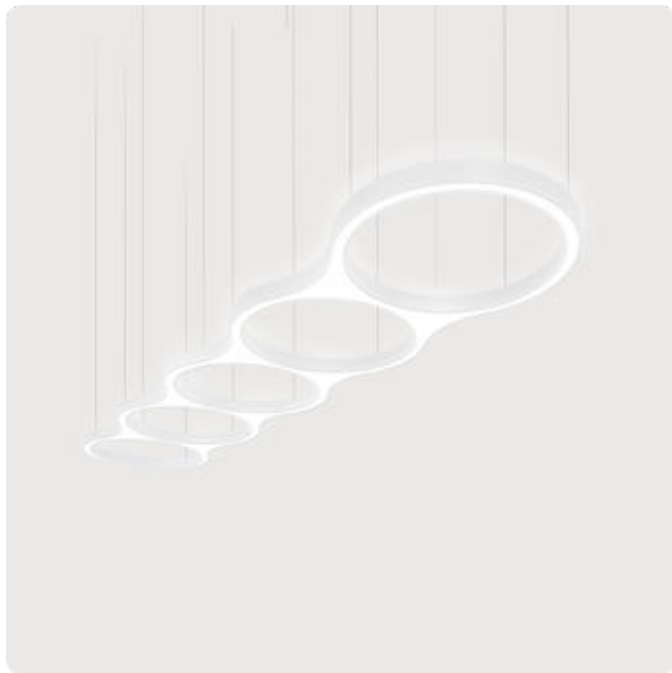

Illustrations may only be similar and serve as an orientation.

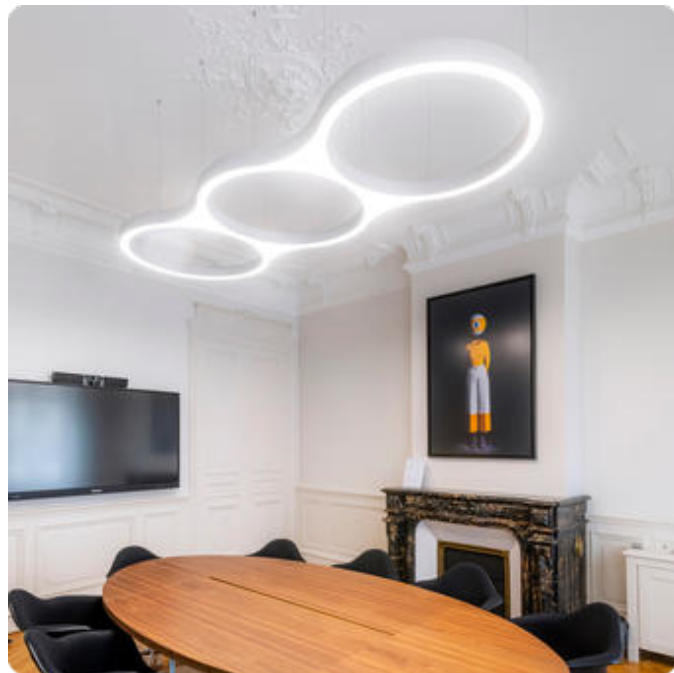



Ringo Star Chain-G3. LED. Pendant luminaire. Completely configured light structure with all necessary light modules, connectors and cord-holders. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct only light distribution. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Switchable. L/DxHxW (5 rings). L/D=4760/1000mm. W=60mm. H=85mm. Cord suspension for parallel installation with power supply

cable and ceiling rose (Set). Pendant length max 4000mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. Medium-power current. 33941lm. 420W. 68,1kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Ringo Star Chain-G3

Pendant luminaire - Direct light distribution

Article code: RG3OWE-827M-5R-K

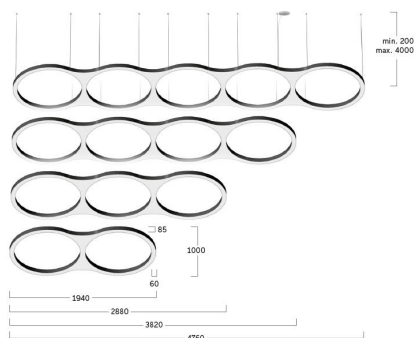

Customer / Project:

Note:

Productname	Ringo Star Chain-G3
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	2700K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Switchable
Length L/Diameter D (mm)	L/D=4760/1000mm
Width W (mm)	W=60mm
Height H (mm)	H=85mm
Current/Power	Medium-Power
Luminous Flux	33941lm
Power consumption	420W
Suspension	Parallel susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 4000mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 27 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	68,1kg

