


Ringo Star Chain-G3

Pendant luminaire - Direct light distribution

Article code: RG3OSE-827M-5R-K



Illustrations may only be similar and serve as an orientation.

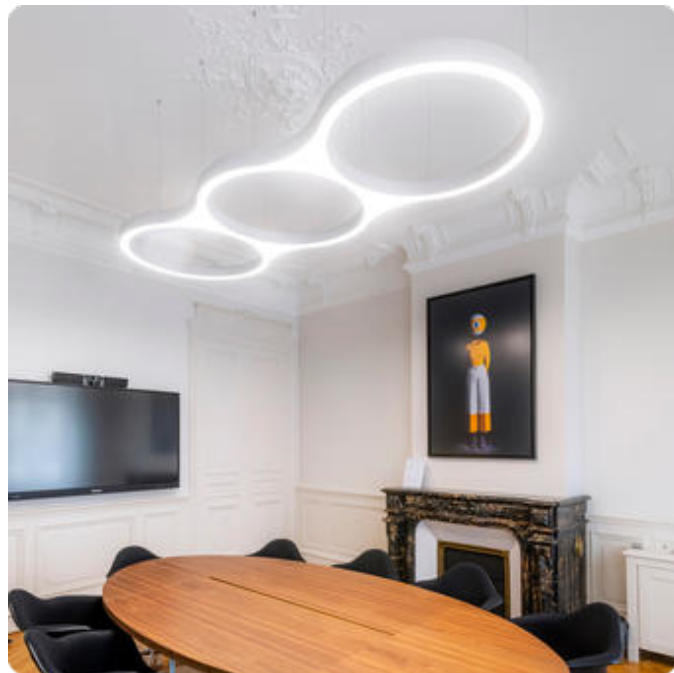



Ringo Star Chain-G3. LED. Pendant luminaire. Completely configured light structure with all necessary light modules, connectors and cord-holders. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct only light distribution. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Switchable. L/DxHxW (5 rings). L/D=4760/1000mm. W=60mm. H=85mm. Cord suspension for parallel installation with power supply

cable and ceiling rose (Set). Pendant length max 4000mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. Medium-power current. 33941lm. 420W. 68,1kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Ringo Star Chain-G3

Pendant luminaire - Direct light distribution

Article code: RG3OSE-827M-5R-K

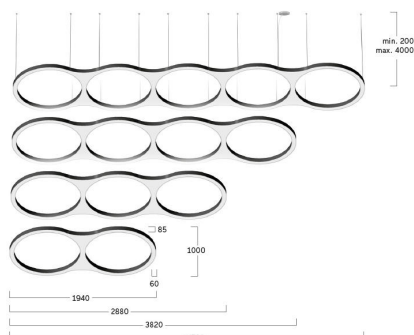

Customer / Project:

Note:

| | |
|------------------------------|---|
| Productname | Ringo Star Chain-G3 |
| Lamp | LED |
| Installation Type | Pendant luminaire |
| Surface finish | Radiant Silver |
| Light characteristics | Direct light distribution |
| Colour temperature | 2700K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Opal diffuser |
| Control | Switchable |
| Length L/Diameter D (mm) | L/D=4760/1000mm |
| Width W (mm) | W=60mm |
| Height H (mm) | H=85mm |
| Current/Power | Medium-Power |
| Luminous Flux | 33941lm |
| Power consumption | 420W |
| Suspension | Parallel susp. (Set) |
| Ceiling rose colour | Ceiling rose: Matching luminaire`s surface colour |
| Pendant length (mm) | Pendant length max 4000mm |
| Degree of protection | IP20 |
| Cable Colour | Power supply: transparent |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| Photometric code | 8 27 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 68,1kg |

